

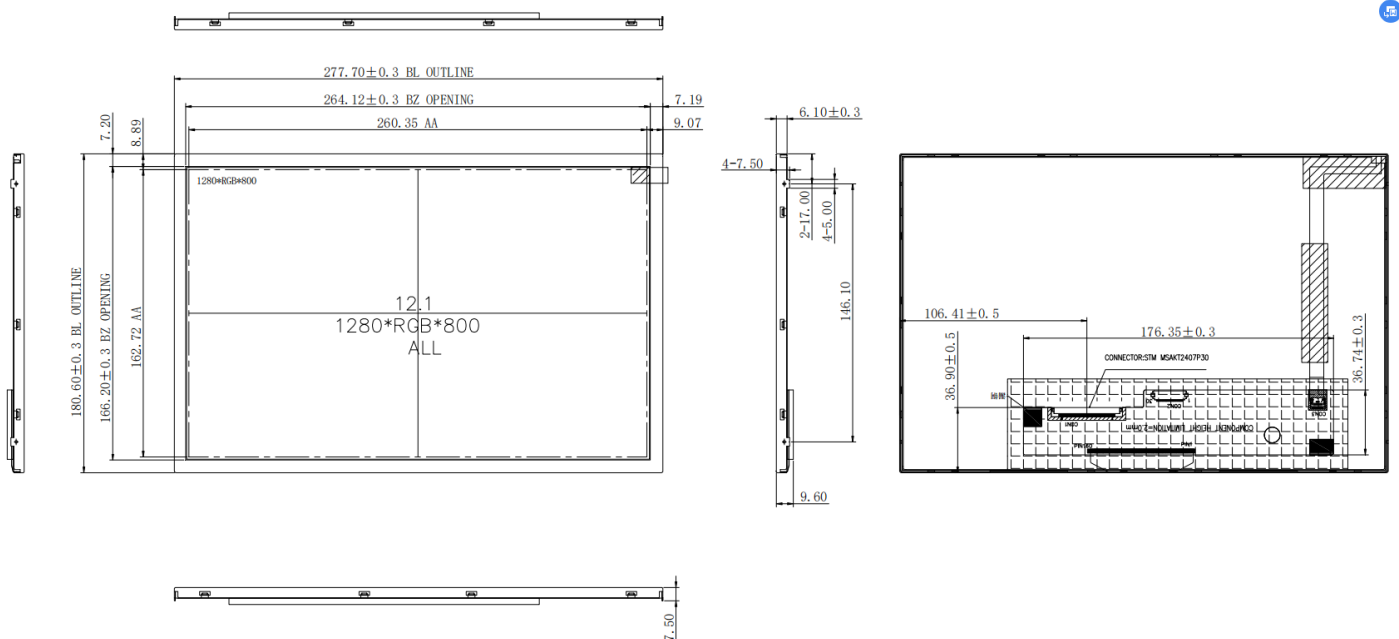
TFT LCD Module (Transmissive TFT LCD)



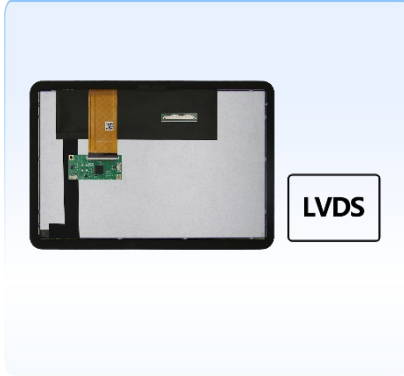
(12.1" 1280 x RGB x 800 Landscape mode "16:10")















Display	
Panel Type	UNI-WXGA121N002D
Resolution(Pixel)	1280 x RGB x 800
Active Area (mm)	260.35(W)×162.72(H)
Pixel Pitch (mm)	0.2034(W)×0.2034 (H)
Display Mode	IPS, Normally Black
Contrast ratio(typical)	1200:1
NTSC(typical)	70%
Display Interface	LVDS
Brightness(typical)	1000cd/m ²
Life Time(Backlight)	LED 30K hrs.
Module Dimension(mm)	277.70(W)×180.60(H)×6.10(T)
Environmental conditions	
Temperature(operating)°C	-30 ~ +80
Temperature(storage)°C	-30 ~ +80

Outline drawing:





Customization

<p>Size</p>  <p>12.1"</p>	<p>Resolution</p>  <p>1280*800</p>	<p>Interface</p>  <p>MIPI</p>	<p>Interface</p>  <p>IPS</p>	<p>Display Panel</p>  <p>178°</p>	<p>Viewing Angle</p>  <p>LVDS</p>	<p>MORE.....</p>
<p>Touch Type</p>  <p>Capacitive</p>	<p>Touch Points</p>  <p>5-Point</p>	<p>Touch Interface</p>  <p>I2C/USB</p>	<p>Touch Panel</p>  <p>Toughened Glass</p>	<p>Touch Panel Tech</p>  <p>Optical bonding solution</p>	<p>Touch function</p>  <p>Anti-Glare</p>	

